

Completely
chemical-free!



Ideal for professional
service provider in the
garden-, municipal
and building cleaning
industry

pipe with handle: wall thickness
of 3 mm and length of 1,100 mm
for professional applications

Suitable for
low and high
pressure

ST-2605


LTF

Our spray gun
ST-2605 with
the patented LTF
technology is
recommended for
effortless working.

Useable at the
left or right:
the handle at the
side optimises
the handling
and protects
during hot water
applications.

The professional surface cleaner for sustainable weed control

- completely made out of stainless steel
- a working width of 400 mm
- 4 nozzles 1/4" M NPT are required
- for the application you need a hot-water device that works with a water temperature of at least 90 °C
- 1/4" nozzles have the ideal spraying angle of 65°
- robustly industrial castors: Ø 260 mm
- energetically developed housing for effective use of hot water
- swivelling application on sloping and vertical areas is possible
- suitable for low and high pressure applications: 0 - 350 bar
- max. temperature: 120 °C
- working temperature: 90 °C - 99 °C

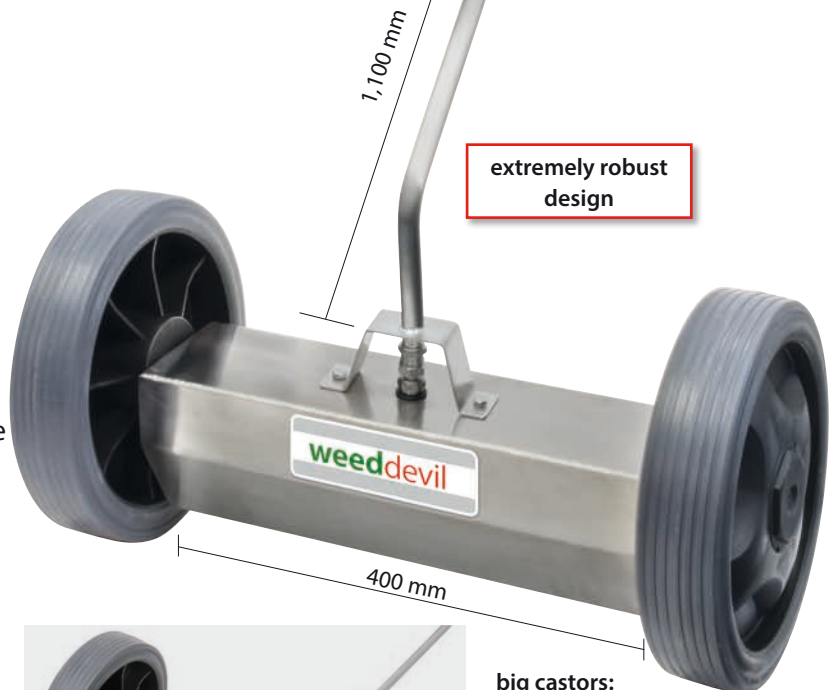

extremely robust
design



big castors:
easy manoeuvring in curves and around
obstacles, even on uneven undergrounds.

At the underside: concentrated and
well-directed hot water without any
temperature loss by an optimally
designed housing having a perfect
cleaning distance.

Part Nr.	material	castors ø	working width	inlet	outlet	pressure	temperature	weight	height / width
200 097 700	stainl. steel	260 mm	400 mm	1/4" F	4 x 1/4" F	max. 350 bar	120 °C	7.4 kg	1,250 / 530 mm